

Simplified LCA - 3500 Series (3508)

The Functional Unit is to Provision of precision temperature measurement and / or control, for a period of 10 years, within industrial applications, the 3508 is a dual loop controller with precision PV measurement combined with high performance control with flexible units with input and output modularity — up to 6 I/O slots with 15 different module types and 2 digital communications.



1031.2100 kg of CO₂eq
Global warming*




4.68E-02 kg of Sbeq
Depletion of abiotic resources*



19,377.2 MJ
Total use of primary energy*

*Results extracted from a simplified life cycle analysis model, aligned with ISO 14040-44 principles - DO NOT COMPLY with ISO 14 025. The results are not comparable with any other assessment

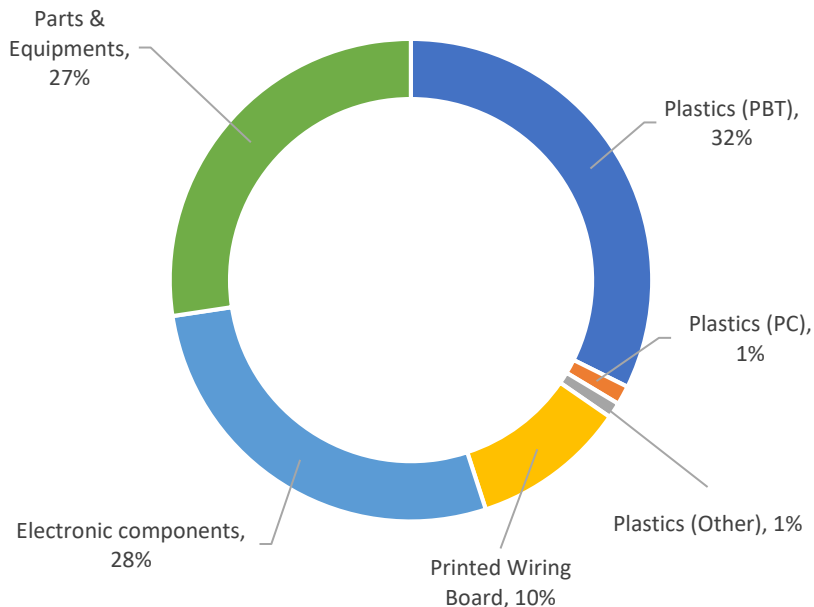

Eurotherm
Customer Care Center
www.eurotherm.com/support
Tel : +44 1903 268500
Faraday Close
Worthing
BN13 3PL
United Kingdom
www.eurotherm.com
www.schneider-electric.com

Published by Schneider Electric
© 2019 - Schneider Electric – All rights reserved