



Eurotherm®

Adaptable power control expertise EPack-2PH Compact SCR Power Controllers

Benefits

OEMs and system integrators need to be able to react quickly to customer needs while maximizing resources. End users continually need to improve operational efficiency and productivity. Eurotherm EPack™-2PH Compact SCR Power Controllers have been designed to deliver real savings, helping to reduce energy costs. Quick and easy to install, integrate and commission. Compact, with powerful and versatile features that help minimize costs whilst improving productivity and quality.

- Improved energy consumption to help reduce energy bills
- Help maximize yield with accurate and repeatable control
- Customizable options provide better value for money
- Easy to specify with reduced number of hardware variants
- Fast integration and commissioning
- Monitor efficiently with integrated measurements
- Simplified design reduces stock and spares holding



Key features


- Native communication: Modbus® TCP and EtherNet/IP or PROFINET comms for easy connection to PLC
- True power control
- Large voltage capability from 100V to 500V adjustable in the same variant
- Measurements: current, voltage, power, impedance, energy usage and more
- SCCR 100kA with fuse

eurotherm.com/epack



Specifications

General	
Safety specification	IEC / EN60947-4-3:2014
EMC emissions specification	IEC / EN60947-4-3:2014 - Class A product
EMC immunity specification	IEC / EN60947-4-3:2014
Vibration tests	IEC / EN60947-1 annex Q category E
Shock tests	IEC / EN60947-1 annex Q category E
Approvals	
European community CE	EN60947-4-3:2014: Low-voltage switchgear and controlgear - Part 4-3: Contactors and motor-starters - AC semiconductor controllers and contactors for non-motor loads (identical to IEC60947-4-3:2014) Declaration of Conformity available on request.
US & Canada UL US LISTED	UL60947-4-1 CAN/CSA C22.2 NO.60947-4-1-14 Low-Voltage Switchgear and Controlgear - Part 4-1: Contactors and Motor-Starters - Electromechanical Contactors and Motor-Starters - U.L. File N° E86160
Australia 	Regulatory Compliance Mark (RCM) to Australian Communication and Media Authority Based on compliance to EN60947-4-3:2014
China	Product not listed in catalog of products subject to China Compulsory Certification (CCC)
Communication  	EtherNet/IP: ODVA Declaration of Conformity All protocol: Certified to Achilles® CRT Level 1 Cybersecurity
Protection	CE: IP20 according to EN60529 UL: open type

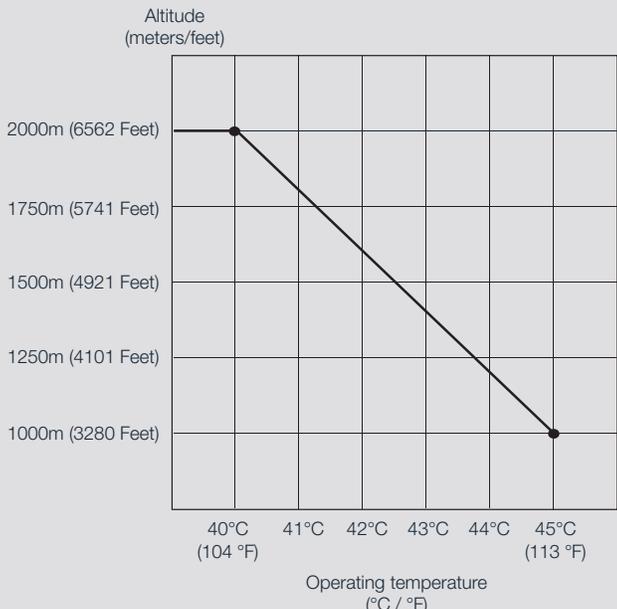Condition of use	
Atmosphere	Non-corrosive, non-explosive, non-conductive
Degree of pollution	Degree 2 according to IEC60947-1
Storage temperature	-25°C (-13°F) to 70°C (158°F)
Temperature & Altitude	0 to 45°C at 1000m (32°F to 113°F at 3280 Feet) 0 to 40°C at 2000m (32°F to 104°F at 6562 Feet)
Derating curves	 <p>The graph plots Altitude (meters/feet) on the y-axis against Operating temperature (°C / °F) on the x-axis. The y-axis has markers at 1000m (3280 Feet), 1250m (4101 Feet), 1500m (4921 Feet), 1750m (5741 Feet), and 2000m (6562 Feet). The x-axis has markers at 40°C (104 °F), 41°C, 42°C, 43°C, 44°C, and 45°C (113 °F). A horizontal line is drawn at 40°C (104 °F) from 0m to 2000m. From 2000m, a diagonal line descends to 45°C (113 °F) at 1000m.</p>

Specifications

Mechanical details

Unit	Height	Width	Depth	Weight
16 to 32A	229.5mm / 9.035in	117mm / 4.61in	192mm / 7.56in	2.53 kg / 5.58lb
40 to 63A	229.5mm / 9.035in	117mm / 4.61in	227mm / 8.94in	2.97 kg / 6.55lb
80 to 100A	291mm / 11.5in	160mm / 6.30in	242mm / 9.53in	5.83 kg / 12.85lb
125A	291mm / 11.5in	240mm / 9.45in	242mm / 9.53in	7.94 kg / 17.50lb

Fuses

Current rating	Fuse holder size	Unit
≤25A without MS	10x38mm / 13/32x1-1/2in	88.5x17.5x64.5mm / 3.48x0.69x2.54in
≤25A with MS	14x51mm / 9/16x2in	110.8x26.5x76.5mm / 4.36x1.04x3.01in
32A with or without MS	14x51mm / 9/16x2in	110.8x26.5x76.5mm / 4.36x1.04x3.01in
40A with or without MS	14x51mm / 9/16x2in	110.8x26.5x76.5mm / 4.36x1.04x3.01in
50A with or without MS	22x58mm / 2-9/32in	127.5x35x76.5mm / 5.02x1.38x3.01in
63A with or without MS	22x58mm / 2-9/32in	127.5x35x76.5mm / 5.02x1.38x3.01in
80A with or without MS	27x60mm / 1-1/16x2-3/8in	149.4x40x93.5mm / 5.88x1.57x3.68in
100A with or without MS	27x60mm / 1-1/16x2-3/8in	149.4x40x93.5mm / 5.88x1.57x3.68in
125A with or without MS	27x60mm / 1-1/16x2-3/8in	149.4x40x93.5mm / 5.88x1.57x3.68in

Power

Nominal current	4 to 125 amps
Nominal voltage	From 100V to 500V +10%/-15%
Accuracy	±2% of full scale from 100V to 500V +10%/-15%
Frequency	47Hz to 63Hz
Short circuit protection	By external supplemental high speed fuses
Rated conditionnal short-circuit current	100kA (coordination type 2)

Utilization categories

AC51	Resistive or slightly inductive load (cos phi>0.8)
AC-55b	Switching of incandescent lamps
AC-56a	Transformer Primary
Heater type	Low/high temperature coefficient and non-aging/aging types: Silicon Carbide, Carbon, SWIR.

Control

Auxillary power supply	100V to 500V +10%/-15% or 24V ac/dc (±20%)
Control setpoint	Analog or Logic input or Digital Comms
Analog input signal	
Voltage	Range: 0-5V, 1-5 V, 0-10V or 2-10V Impedance: 140 k Ohms typical (0-10V signal)
Current	Range: 0-20mA or 4-20mA Input resistance: 100 ohms to allow for three units wired in series to be driven from a single controller's analogue output
Resolution	11 bits
Linearity ±0.1% of scale	±0.1% of Scale
Firing mode	Variable modulation burst firing (default 16 cycles), Fix modulation period (default 2 seconds), Logic mode
Control mode	V ² control, I ² control, True Power control, Open loop with feedforward and Trim modes, Current limitation by transfer V ² to I ² or P to I ²
Configurable digital inputs	Input 1: enable by default ; Input 2: setpoint in logic mode, alarm acknowledgment, 10V supply, ...
Voltage inputs	PLC compatible inputs type 1 & 2 according to IEC 61131-2 - Active level (high): 11V<Vin<30V with 6mA<Iin<30mA - Non-active level (low): -3V<Vin<5V with 2mA<Iin<30mA or 5V<Vin<11V with Iin<2mA
Contact closure inputs	- Current source: 10mA min; 15mA max - Open contact (non active) resistance: 800 Ohms to ∞ - Closed contact (active) resistance: 0 to 450 Ohms - Absolute Maximum ±30V or ±25mA
One alarm relay	Changeover relay 2A rms - 264V rms normally energised. (250V rms max for UL). This relay will be de-energised in case of serious alarms: short circuit thyristor, open circuit, fuse blown, missing main, chop off

Specifications

Communications

Connection	Dual port Ethernet - RJ45 integrated switch
Protocols	Modbus TCP, EtherNet/IP, PROFINET
Speed rate	10/100 Mbps full or half duplex

Display





Technology	TFT
Size	1.4" diagonal (35.56mm)
Messages	Configuration, Monitoring and Diagnostics

Additional functions

Standard	Counter, Logic & Math blocks, Linearization 16 points, Timer, Totalizer
Options	Energy counter, OEM security, Graphical wiring


Mechanical details

16A to 32A & 40A to 63A

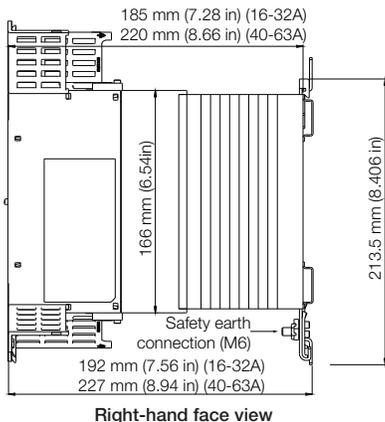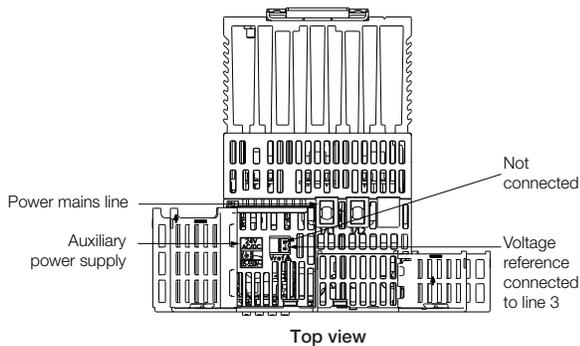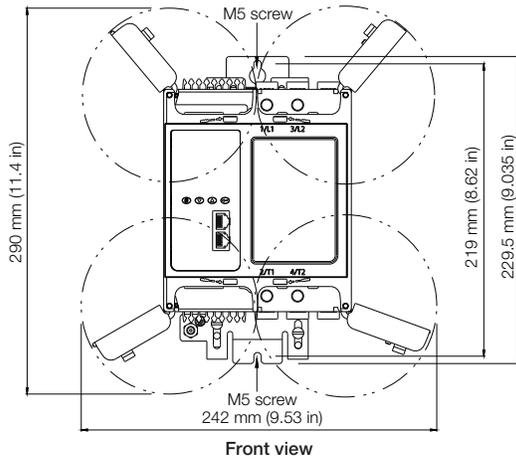
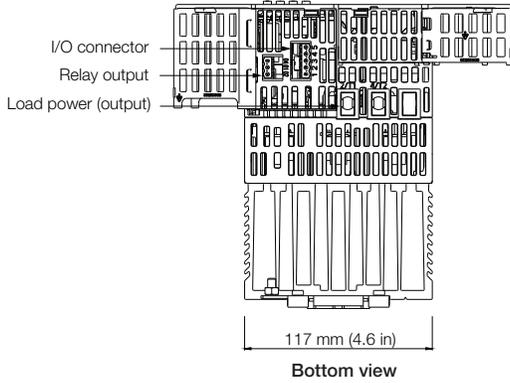


Connector details (pinout)

I/O details

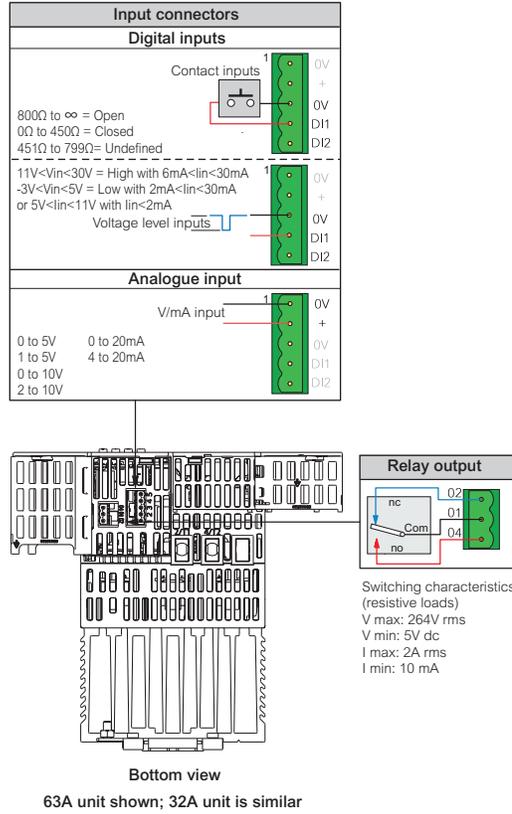


Power supply details 16A to 63A

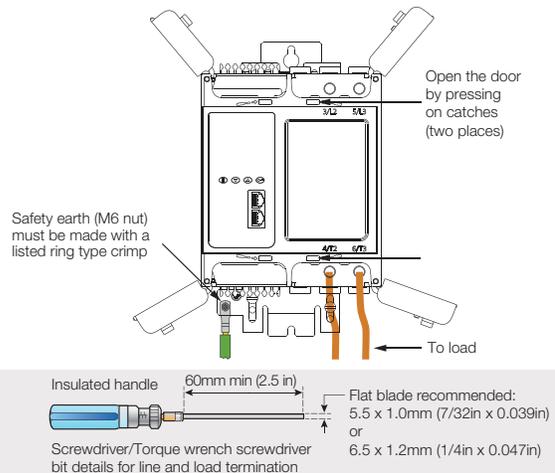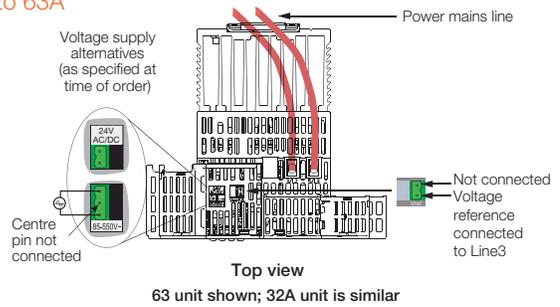


Mechanical details

80A to 100A

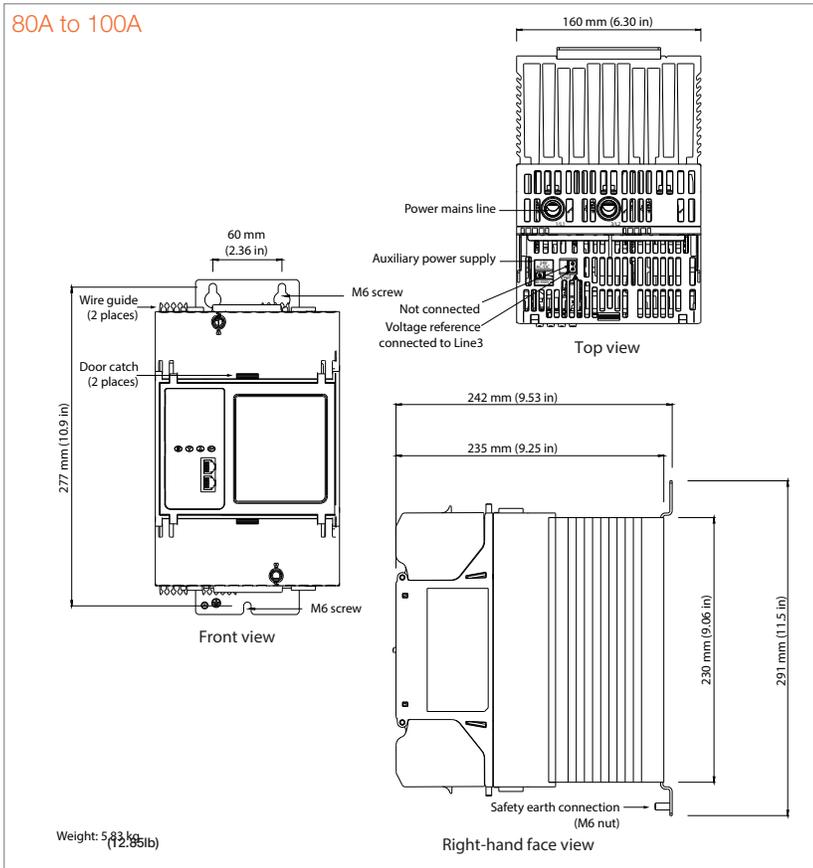


Connector details (pinout)


I/O details

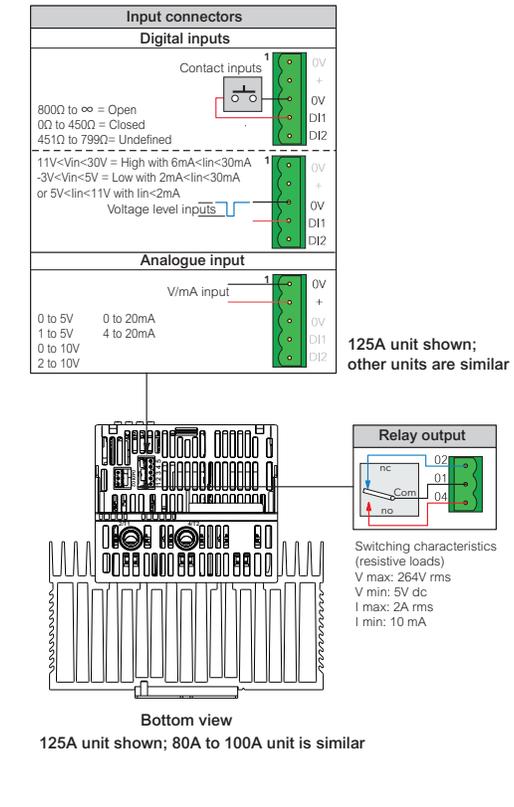

125A

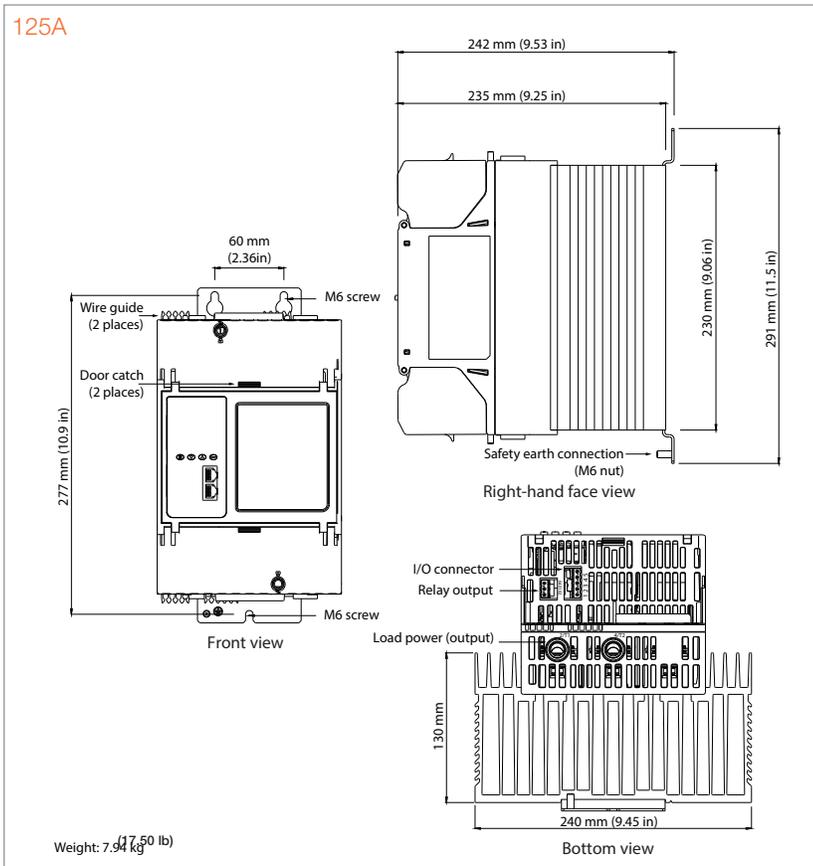

Power supply connection details
80A to 125A

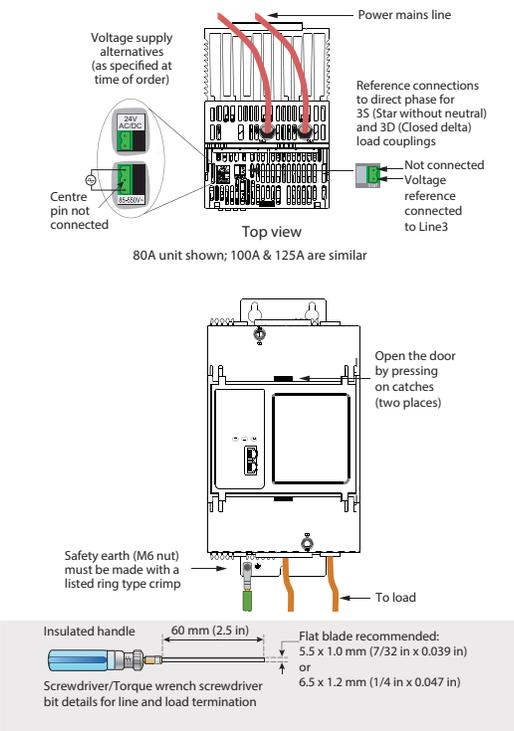


Specifications

E-Pack-2PH controller order codes

The E-Pack power controller is ordered using a short code for hardware and chargeable software options and an optional extended code section configuration of commissioning options.

If the extended code is not used, the software configuration is completed using a quick start procedure or using Eurotherm iTools software.

E-Pack controllers may be upgraded with additional chargeable options at any time using a software key order code.

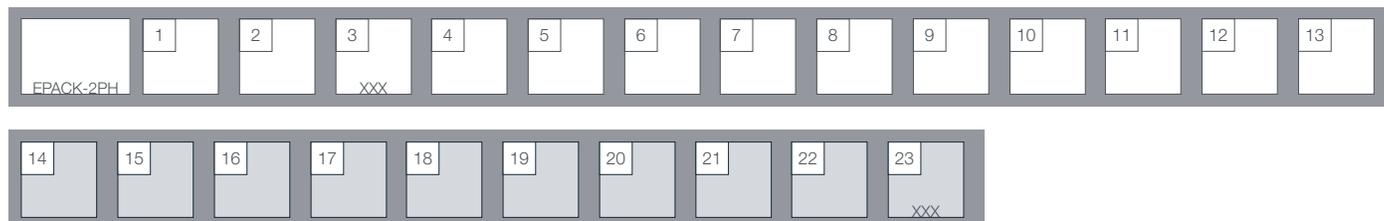

Basic product	
EPACK-2PH	Compact SCR Power Controller

1 Maximum current	
16A	16 amps
25A	25 amps
32A	32 amps
40A	40 amps
50A	50 amps
63A	63 amps
80A	80 amps
100A	100 amps
125A	125 amps

2 Auxillary power supply	
500V	500V max
24V	24V ac/dc

3 Reserved	
XXX	Reserved

4 Control option	
V2	V ² control (standard)
I2	I ² control
PWR	Power control

5 Transfer option	
XXX	"No transfer"
TFR	I ² transfer

6 Energy option	
XXX	None
EMS	Energy measurement

7 Comms option	
TCP	Modbus TCP (standard)
IP	EtherNet/IP
PN	PROFINET

8 OEM security	
XXX	None
OEM	OEM security

9 Warranty	
XXXXX	Standard warranty
WL005	5 Year warranty
USWL3	US extended warranty

10 Custom labelling	
XXXXX	Standard (Eurotherm)
Fnnnn	Special label

11 Graphical wiring	
XXX	None
GWE	Graphical wiring editor (standard)

12 Fuse	
XXX	Without
HSP	High speed fuse without microswitch
HSM	High speed fuse with microswitch

13 Configuration	
XXXXXX	Default
LC EEnnn	Long code Customer clone number

Optional configuration

14 Nominal load current	
nnnA	1 - Value field 1

15 Nominal line voltage	
100V	100 volts
110V	110 volts
115V	115 volts
120V	120 volts
127V	127 volts
200V	200 volts
208V	208 volts
220V	220 volts
230V	230 volts
240V	240 volts
277V	277 volts
380V	380 volts
400V	400 volts
415V	415 volts
440V	440 volts
460V	460 volts
480V	480 volts
500V	500 volts

16 Load configuration	
3S	Star without neutral
3D	Closed delta

17 Load type	
XX	Resistive
TR	Transformer primary

18 Heater type	
XX	Resistive
CSI	Silicon carbide
SWIR	Short wave infra-red

19 Firing mode	
BF	Variable modulation burst firing (default 16 cycles)
FX	Fix modulation period (default 2 seconds)
LGC	Logic mode

20 Analog input function	
XX	None - Setpoint via comms
SP	Setpoint
HR	Setpoint limit
TS	Current transfer span

21 Analog input type	
0V	0-10 volts
1V	1-5 volts
2V	2-10 volts
5V	0-5 volts
0A	0-20 mA
4A	4-20mA

22 Digital input 2 function	
XX	None
LG	Setpoint for logic mode
AK	Alarm acknowledgement
RS	Remote setpoint selection
FB	Fuse blown
SU	10V supply

23 Reserved	
XXX	Reserved

Specifications

Software upgrade options



1	Serial number instrument
nnnn	Serial number

2	Current ratings
XXX	No change
16A-25A	Upgrade 16A to 25A
16A-32A	Upgrade 16A to 32A
25A-32A	Upgrade 25A to 32A
40A-50A	Upgrade 40A to 50A
40A-63A	Upgrade 40A to 63A
50A-63A	Upgrade 50A to 63A
80A-100A	Upgrade 80A to 100A

3	Control option
XXX	No change
V2-I2	Upgrade V2 to I2
V2-PWR	Upgrade V2 to PWR
I2-PWR	Upgrade I2 to PWR

4	Transfer option
XXX	No change
TFR	I2 transfer

5	Energy option
XXX	No change
TFR	Energy measurement

6	Comms option
XXX	No change
IP	EtherNet/IP
PN	PROFINET

7	Graphical wiring
XXX	No change
GWE	Graphical wiring editor

8	OEM security
XXX	No change
OEM	OEM security

Eurotherm US LLC
 44621 Guilford Drive, Suite 100
 20147 Ashburn, VA
 USA
 Phone: +1-703-724-7300
www.eurotherm.com

Contact your local sales representative



Document Number HA032852USA Issue 5

Watlow, Eurotherm, EurothermSuite, EFit, EPack, EPower, Eyon, Chessell, Mini8, nanodac, piccolo and versadac are trademarks and property of Watlow its subsidiaries and affiliated companies. All other trademarks are the property of their respective owners.

©Watlow Electric Manufacturing Company. All rights reserved.

