

A large industrial vacuum furnace is shown in a factory setting. The furnace is a large, cylindrical metal structure with a circular opening on the left side. It is surrounded by various pipes, valves, and structural elements. The background shows a complex industrial environment with multiple levels and scaffolding.

Expertise to Improve Heat Treatment Process Efficiency

Eurotherm[®]

Improving Control to Reduce Maintenance and Energy Cost

Upgrading a VRT power supply to an EPower advanced power control solution, improved reliability and efficiency in an AMS certified heat treatment vacuum furnace.

eurotherm.com/heattreat

Life Is On

Schneider
Electric



Our customer is part of a group recognized as an innovator in a wide range of heat treatment processes. Their valued heat treatment expertise meets the needs of forges, gear manufacturers, and toolmakers in the Auvergne-Rhône-Alpes region.

THE CUSTOMER

Established in the 1970s, the company specializes in the treatment of large parts in vacuum and controlled gas heat treatment processes.

Through development work in the aeronautics sector, the business has established high levels of expertise and know-how which have enabled the business to achieve international Nadcap accreditation.

Challenges

Previously, the customer used Variable Reactance Transformer (VRT) technology for most of their furnace power supplies. VRT devices incorporate saturated magnetic cores with an isolation transformer. These analog power supplies performed well during initial heating of the furnace. However, they had a few drawbacks that were impacting reliability and quality.

- At control outputs below 100% the VRTs caused high harmonic distortion on the power supply and poor power factor. Due to the resulting heat losses in the system, water cooling was required.
- The cooling water needed to be treated to prevent corrosion, mineral build-up and cooling system blockage.
- Water pipes were sometimes clogging, causing maintenance issues, and dielectric insulation in the pipes was at risk of breaking down, causing safety concerns.
- Deadband regions caused by the VRT resulted in unstable control of the furnace heaters. Therefore, the control loop strategy was more difficult to setup and adjust, becoming less robust over time.
- The analog VRTs caused difficulties in the control of the furnace heaters. The required stability and accuracy could not be achieved causing process repeatability issues.
- At outputs below 100%, the VRTs were suffering power leakage and a significant decline in energy efficiency.
- Poor power factor meant energy was being wasted in the system, leading to unnecessary extra cost.

Goal

Improve vacuum furnace power supply reliability. Increase process repeatability, performance and energy efficiency.

Story

Heater power was controlled by 3 VRTs. Over time, VRT cooling pipes were clogging, increasing maintenance time and cost. Unstable temperature control was affecting production quality and process efficiency.

Solution

Three zone control system cabinet based on Eurotherm EPower™ Advanced SCR Controller, with Predictive Load Management and corrective setpoint balancing coefficients to homogenize the furnace temperature.

Results

- Improved power factor (better than 0.9) across 1 - 100% of power output range
- Decreased maintenance time and cost, and reduced the risk of harm from deteriorating electrical equipment
- Improved process repeatability
- Increased furnace class
- Optimized energy efficiency and reduced peak demand charges
- 11% energy savings
- Two year return on investment

A high efficiency cost effective solution

Eurotherm provided a turnkey power system solution based on EPower Advanced SCR Controller with air cooled transformer. This system has now been in operation for over 10 years.

Reduced CAPEX and OPEX

Improved power factor achieved by the EPower controller meant costly unreliable water cooling was no longer needed. Therefore the Eurotherm solution cost less than the VRT solution and enhanced system robustness.



Since its installation, no unplanned maintenance issues have been reported.

Better measurement accuracy and control precision improved temperature linearity, process repeatability and Nadcap class uniformity.

Thanks to EPower hybrid control, no filters or power factor correction systems were needed to meet the power factor limits set by the energy supplier.

The power factor was greatly increased due to less harmonic content, and peak power demands were reduced by EPower Predictive Load Management strategy, resulting in electricity cost savings of 11%.

In this case, based on local energy costs, the EPower solution achieved a two year return on investment.

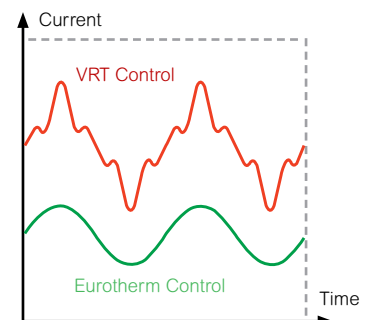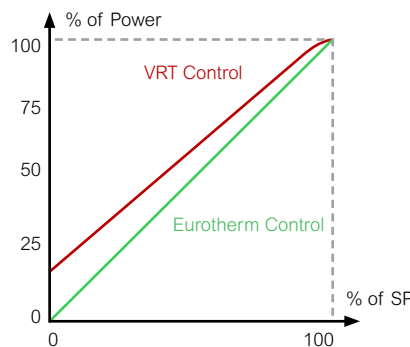

Eurotherm digital SCR power control helps to provide linear control across the entire output % range, whereas the VRTs cause unstable control at low setpoints.

VRTs waste energy by drawing more power from the supply than is required by the heater due to harmonic generation at most setpoint levels.

Eurotherm EPower Advanced SCR Power Controller

The EPower Controller is EcoStruxure-ready and has been carefully designed to provide optimum efficiency in industrial electrical heating systems. EcoStruxure™ is Schneider Electric's IOT enabled system architecture and platform.

- Digital, high accuracy power control
- Corrective coefficient in EPower controller rebalances temperature inside the furnace
- Predictive Load Management smooths the energy consumption to avoid peak power demand





Discover
EPower Controller



Discover
Heat Treatment



Contact us

Life Is On

Schneider
Electric

Eurotherm USA
44621 Guilford Drive, Suite 100
20147 Ashburn, VA
USA
Phone: +1-703-724-7300
Fax: +1-703-724-7301

www.eurotherm.com

Document Number HA033499USA Issue 1 ©2020 Schneider Electric. All rights reserved.

Schneider Electric, Life Is On, EcoStruxure, Eurotherm, EurothermSuite, EFit, EPack, EPower, Eycon, Eyris, Chessell, Mini8, nanodac, optivis, piccolo and versadac are trademarks of Schneider Electric SE, its subsidiaries and affiliated companies. All other trademarks are the property of their respective owners.

