


- 250mm Strip Chart Recorder
- Up to 4 continuous writing pens
- High speed annotation of text, scales and logs
- 80-character, 3-colour, vacuum fluorescent display
- Data storage to PCMCIA memory card
- High speed (4 Hz) scanning of all inputs

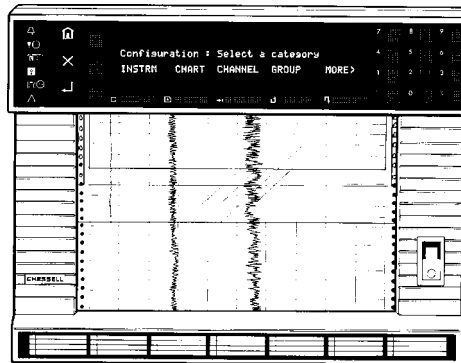

The Eurotherm Chessell 4250C, high specification, 250mm continuous-trace chart recorder combines the latest technology with the proven reliability for which Chessell are renowned. Designed to meet the rigorous requirements of an industrial environment, the recorder is ideal for production or test purposes.

Tracing system

Up to 4 continuous traces can be updated and recorded by the long-life pens. The annotator option allows concurrent text printing on the chart, producing a clear record for later reference. The use of the pen offset compensation feature can enhance the record still further.

High Visibility Display

The multi-colour, 80-character vacuum fluorescent display, with red and green bargraphs, indicates process values, alarms and alarm setpoints.

Configuration

Configuration is password protected and follows clear, English, French or German prompts to give access to all recorder variables, allowing easy configuration and adjustment in the field. PC software is available to configure the recorder via an integral connector, an optional communications port, or a PCMCIA data card.

Input Technology

Using the very latest in Application Specific Integrated Circuits (ASIC) and surface mount technology, the 4250C provides input circuitry of high accuracy and stability. All inputs to the 8-channel input board are scanned at 4Hz and are isolated to 250V channel-to-channel and channel-to-ground.

Alarms

A sophisticated alarms package offers up to four alarms per channel. These alarms can be configured as absolute high/low, rate of change rising/falling, deviation in/out or digital change of state.

Options

Pen offset compensation

The performance of the chart recorder can be greatly enhanced by this feature which eliminates the time differentials between trace 1 and the other traces (which otherwise lag by amounts proportional to chart speed).

Annotation

Annotation of the chart with channel scales, time/date markings, logs and other messages provides the clearest record possible. The annotator pen can also be used to trace an additional input channel or calculated channel.

Memory Card Archiving

Use of the widely accepted PCMCIA standard allows data to be stored in a format readable by commercial spreadsheet packages. Alternatively data can be stored in a format which allows multiple copies to be produced on the chart. The recorder's configuration can also be stored on the card for transfer to another recorder or to a PC for manipulation using the PC configuration editor.

Maths, Timers, Counters, Totalisers

These options provide the recorder with integrating and counting facilities, and with the ability to carry out calculations ranging from simple arithmetic functions (such as subtracting one channel from another), to complex, application specific functions such as Relative Humidity calculations.

Serial Communications

Using the MODBUS protocol, a host computer can read process information from up to 16 recorders on an RS422/485 multi-drop loop. RS232 is also selectable for single-drop applications.

Model 4250C
Specification
sheet

TECHNICAL SPECIFICATION (Recorder)

Board types

Input board types	8-channel universal; 16-channel dc*
Output board types	8-channel relay output, 4/8-channel analogue output (AO)
Max number of input channels	32
Max number of outputs	8 x no of free slots.
relay o/p:	8
Analogue o/p:	8
Maximum number of traced channels	4 continuous + 1 or more dotted if annotator option fitted.

*Volts, mV, mA, thermocouple, contact closure, but not resistance inputs.

Environmental Performance

General	To BS2011: 1981
Temperature limits	Operation: 0 to + 50 °C Storage: -20 to +70 °C
Humidity	Operation: 5 to 80% RH; non-condensing Storage: 5 to 90% RH; non condensing
Maximum altitude	<2000 metres
Protection	IP54 (door and bezel); IP31 (sleeve).
Shock	BS EN61010 1990 (Safety); IEC873: 1986
Vibration	BS EN61010 1990 (safety); IEC873: 1986. Also recovers from 2g peak at 10 to 150 Hz

Electromagnetic compatibility (EMC)

Emissions	BS EN50081-2
Immunity	BS EN50082-2

Electrical Safety

To BS EN61010: 1990 Class 1.

Physical

Bezel size (mm)	288 high x 360 wide x 53 deep.
Panel cutout size	273.5 mm x 348 mm (+ 1.4 - 0 mm.)
Depth behind bezel rear face	450 mm. (inc. rear cover); 410 mm. (no rear cover)
Weight (Eight-channel instrument)	20 kg. max.
Panel mounting angle	Up to ± 30° from vertical.

Writing system

Method	1, 2, 3 or 4 fibre-tipped disposable (FTD) pens with individual pen trays. The annotator option (if fitted) can be used to trace one or more additional channels.
Pen colours	Green (bottom), red, blue and black (top). Annotator (if fitted) is violet.
Pen life	Continuous pens: 1km at pen-to-chart speed of 10m/hr Annotator pen: 500,000 dots
Pen spacing (in chart time axis)	3mm. (Pen offset compensation can be invoked to synchronise traces.)
Pen traverse time	0.5 secs to within 2%; 1 sec to 0.1%
Pen drive system	Low inertia servo with resistive feedback
Annotator characters per line	104
Noise level	55 dBA max. (door closed)

Performance

Maximum scan and update rate	All parameters in 1/4 second (1 second for 16channel board)
Clock accuracy	Better than 50 ppm

Paper transport

Type	Tractor feed with selectable chart speed from 1 to 7200 mm/hr.
Chart length	22 m x 75mm (z - fold); 32 m (roll).
Chart width	274.5 mm overall; 250 mm calibrated.
Chart visible length	155 mm
Resolution (horizontal)	± 0.2 mm.
Pen-to-paper accuracy	0.25% of calibrated chart width.
Transport accuracy	Better than 10 mm. in 32 meters.

Recorder Specification (Cont.)

Power requirements:

Line voltage (45 to 65 Hertz)	90 to 132 Volts or 180 to 264 Volts (User selectable).
Maximum power	120 W
Fuse type	Ceramic 20 mm. 3.15 Amp. Fast blow.
Interrupt protection	100 ms at 60% load.
Memory protection	EEPROM (for configuration) Battery-backed RAM for clock, etc.
RAM / clock-support battery type	Nickel-Cadmium (rechargeable)
Support period (no power to recorder)	3 months min. at 25 °C; 1 month min. at 50 °C.

8-CHANNEL UNIVERSAL I/P BOARD SPECIFICATION

General specification

Number of inputs	8
Termination	Edge connector / terminal block
Input types	DC Volts, dc millivolts, dc milliamps (with shunt). Thermocouple, RTD (2- or 3-wire), Ohms, Contact closure
Input type mix	User selectable during configuration.
Measurement frequency	All channels in 1 second
Step response to within resolution	2 seconds
Noise rejection	Common mode: 150dB above 45 Hz. (channel-channel and channel-ground.) Series mode: 67dB above 45 Hz.
Maximum common mode voltage	250 Volts
Maximum series mode voltage	10 mV at lowest range; 500 mV peak at highest range.
Isolation (dc to 65 Hz; BS EN61010)	Installation cat.2 Pollution degree 2
channel-to channel	300 V (double isolation)
channel-to-ground	300 V (basic isolation)
Dielectric strength	channel-to-channel 2350 V ac (1 minute type test) channel-to-ground 1350V ac (1 minute type test)
Insulation resistance	50 MΩ at 500V dc.
Input impedance	>10 MΩ (68.8kΩ for 10V ranges)
Over-voltage protection	60 Volts peak; 500 Volts through 50 kΩ resistor
Open cct detection (to 200 mV range)	65 nA current max. 8 seconds recognition time (max.) 40 MΩ minimum break resistance.

DC input ranges

Ranges available	See table 1
Temperature performance (worst case)	
-10 to +40mV	(80ppm reading + 27.9ppm range)/°C
-50 to +200mV	(80ppm reading + 12.4ppm range)/°C
-0.5 to +1.0V	(80ppm reading + 2.1ppm range)/°C
-5 to +10V (100V with attenuator)	(272ppm reading + 4.7ppm range)/°C
Shunt/Attenuator	Externally mounted resistor modules
Additional error due to above	0.1% (shunt); 0.2% (attenuator)
Typical performance	See table 1

Range	Resolution	Performance (worst case) in instrument at 20 °C
-10 mV to +40 mV	1.4 μV	0.083 % reading + 0.056 % range
-50 mV to +200 mV	14 μV	0.072% reading + 0.073% range
-0.5 V to +1 V	37 μV	0.070% reading + 0.032% range
-5 to +10 V	370 μV.	0.223% reading + 0.034% range

Table 1 DC performance - 8-channel board

Thermocouple data

Linearisation errors	0.15 °C or better
Bias current	<2 nA (<10 nA at 70 °C)
Cold Junction (CJ) types (selectable)	Off, internal, external, remote.
CJ error	0.5 °C or better
CJ rejection ratio	25:1 minimum
Remote CJ	Via any user-selected input channel.
Upscale/downscale drive	Configurable for each channel
Types and ranges	See table 2

Installation category II: The rated impulse voltage for equipment on nominal 230V mains is 2500V.
Pollution degree 2: Normally, only non-conductive pollution occurs. Occasionally, however, a temporary conductivity caused by condensation shall be expected.

T/C type	Range (°C)	Standard
B	+200 to +1800	IEC584.1:1977
C	0 to +2300	Hoskins
E	-200 to +1000	IEC584.1:1977
J	-200 to +1200	IEC584.1:1977
K	-200 to +1370	IEC584.1:1977
L	-200 to +900	DIN 43710
N	-200 to +1300	IEC584.1:1977
R	-200 to +1760	IEC584.1:1977
S	-50 to +1760	IEC584.1:1977
T	-250 to +400	IEC584.1:1977
U	-100 to +600	DIN 43710-85
NiNiMo	0 to +1300	Eurotherm Recorders
Platinel II	-100 to +1300	Engelhard R83

Table 2 Thermocouple types and ranges

3-wire RTD data

RTD linearisations Pt100, Pt1000, Cu10, Ni100, Ni120
 Linearisation errors 0.012 °C or better
 Influence of lead resistance error: 0.15 % of lead resistance
 mismatch: 1 ohm per ohm.
 Types and ranges See table 3
 Pt100 performance (worst case) See table 4

RTD type	Range (°C)	Standard
Pt 100	-200 to +850	IEC751: 1981
Pt1000	-200 to +850	Based on IEC751: 1981
Cu 10	-20 to +250	General Electric
Ni 100	-50 to +170	DIN43760
Ni 120	-50 to +170	Based on DIN 43760

Table 3 RTD types and ranges

Range °C	Resolution	Performance (worst case) in instrument at 20 °C
-200 to +200	0.02 °C	0.033% reading + 0.32 °C
-200 to +1000	0.14 °C	0.033% reading + 1.85 °C

Table 4 Typical Pt100 performance

Ohms ranges

Ranges See table 5
 Temperature performance (worst case)
 0 to 180Ω (35ppm reading + 34.3ppm range)/°C
 0 to 1.8kΩ (35ppm reading + 14.6ppm range)/°C
 0 to 10kΩ (35ppm reading + 1.9 ppm range)/°C

Range	Lead resistance	Resolution	Performance (worst case) in instrument at 20 °C
0 to 180 Ω	10 Ω	5 mΩ	0.033% reading +0.070% range
0 to 1.8 kΩ	10 Ω	55 mΩ	0.033 % reading + 0.041 % range
0 to 10 kΩ	10 Ω	148 mΩ	0.037 % reading + 0.020 % range

Table 5 Ohms ranges

Other linearisations

Tables available $\sqrt{\text{value}}$; $(\text{value})^{3/2}$; $(\text{value})^{5/2}$; User defined tables (up to 3 off)

Contact closure (switch) inputs

Type Volt-free contact
 Wetting voltage 2.5 Volts nominal
 Minimum latched pulse width 125 ms.
 De-bounce Inherent 1 second.

16-CHANNEL DC INPUT BOARD SPECIFICATION

General specification

Number of inputs 16
 Termination Edge connector/terminal block
 Input types DC volts, dc mV, dc mA (with shunt), thermocouple, contact closure (not channels 1, 8 or 16)
 Input mix Software selected on configuration for each channel. (Max. eight different linearisations (inc. linear) per board
 Measurement frequency All channels in 1 second
 Step response to within resolution 1.5 seconds
 Noise rejection Common mode: 150dB above 45 Hz. (chan-chan and channel-ground.)
 Series mode: > 60dB between 10 to 100 Hz.
 Maximum series mode voltage Hardware range +50 mV.
 Safety isolation (BS EN61010) Installation cat.ii; Pollution degree 2
 Channel-to-channel 300V (double isolation)
 Channel-to-ground 300V (basic isolation)
 Dielectric strength Channel-to-channel 2350 V ac continuous
 Channel-to-ground 1350V ac
 Input impedance > 10 MΩ (68.8kΩ for 5V range)
 Over-voltage protection 60 Volts peak, 500 V through 50 kΩ resistor.
 Open cct detection (85 mV range only) 65 nA current max.
 8 seconds recognition time (max.)
 40 MΩ minimum break resistance.
 Damping 2, 4, 8, 16, 32, 64, 128 or 256 secs. time constant, as configured.

16- channel i/p board specification (Cont.)

DC input ranges

Ranges available -15mV to +85 mV; -1.0 V to +5 V
 Temperature performance (worst case)
 -15mV to +85mV (80ppm reading +12.9ppm range)/°C
 -1V to +5V (272ppm reading +7.8ppm range)/°C
 Shunt Externally mounted resistor modules
 Additional error due to shunt 0.1%.
 Performance (worst case) See table 6

Range	Resolution	Performance (worst case) in instrument at 20 °C
-15 mV to +85 mV	± 5.5 μV	0.072% reading + 0.071% range
-1.0V to +5 V	± 280μV	0.223% reading + 0.055 range

Table 6 DC performance (16-channel board)

Thermocouple data (in addition to the above)

Linearisation errors 0.15 °C or better
 Bias current < 2 nA (< 10 nA at 70 °C)
 Cold Junction (CJ) types (selectable) Off, internal, external, remote.
 CJ error 1 °C or better
 CJ rejection ratio 25:1 minimum
 Remote CJ Via any user-selected input channel.
 Upscale drive Configurable for each channel
 Types and ranges See table 2

Other linearisations

Tables available $\sqrt{\text{value}}$; $(\text{value})^{3/2}$; $(\text{value})^{5/2}$; User defined tables (up to 3 off)


Contact closure inputs (not channels 1, 8 or 16)

Type Volt-free contact
 Wetting voltage 2.5 Volts nominal
 Minimum latched pulse width 250 ms.
 De-bounce Inherent 1 second.

RELAY OUTPUT BOARD SPECIFICATION

No of relays per board Eight
 Contact format Single pole change-over (single set of common, normally open and normally closed contacts)
 Estimated life at 60VA load* 1,000,000 operations
 Max contact voltage* 250 Volts ac.
 Max contact current* Make: 8 Amp
 Continuous: 3 Amps
 Break: 2 Amps
 Maximum switchable power* 60 watts or 500 VA
 Isolation (BS EN61010) Installation cat.. II, Pollution degree 2
 Channel-to-channel 300V ac (double isolation)
 Channel-to-ground 300V ac (basic isolation)
 Dielectric strength 1350V ac for 1 min. (contact to contact)
 2350V ac for 1 min. (channel to channel)
 1350V ac for 1 min. (channel to ground)




* With resistive loads. Derate with reactive or inductive loads according to the graph in which:
 F1 = measured on representative samples
 F2 = typical values (according to experience)
 Contact life = resistive life x Reduction factor




ANALOGUE OUTPUT BOARD SPECIFICATION

General specification

Number of outputs Four or eight as ordered
 Termination Edge connector / terminal block
 Output types Current or Voltage as configured for each channel
 Current: 0 to 25mA max. at up to 24 V
 Voltage: -1 to 11V at up to 5 mA
 Output frequency All channels in 1 second
 Output damping 250 msec rise time (10% to 90%)
 Resolution 0.025% full scale, monotonic.
 Isolation (dc to 65 Hz; BS EN61010) Installation cat. II; Pollution degree 2
 Channel to channel: 300V RMS or dc (double isolation)
 Channel-to-ground: 300V RMS or dc (basic isolation)
 Dielectric strength (BS EN61010) (1 minute type tests)
 Channel to channel: 2350 V ac
 Channel to ground: 1350V ac
 Insulation resistance 50 MΩ at 500V dc.

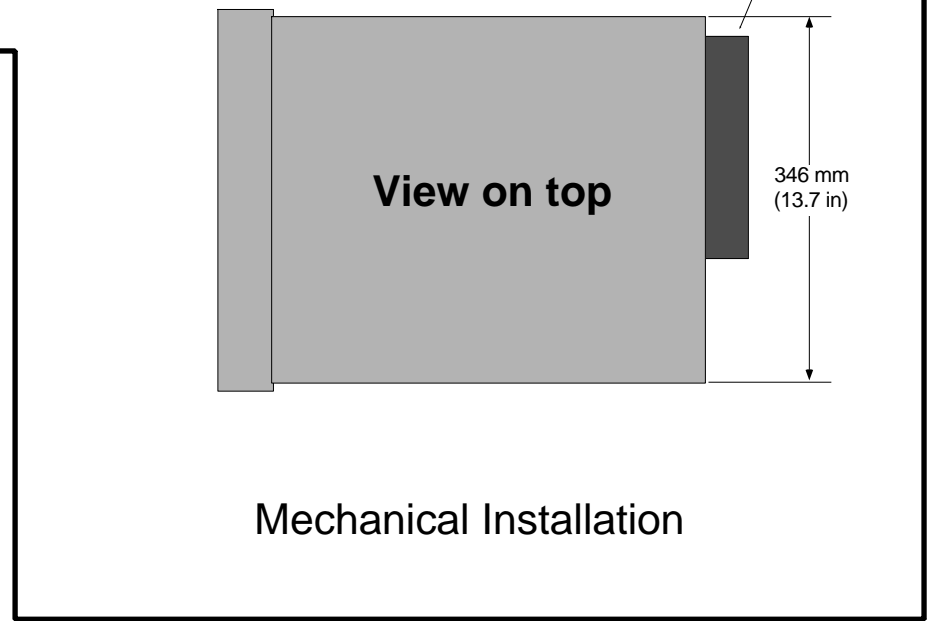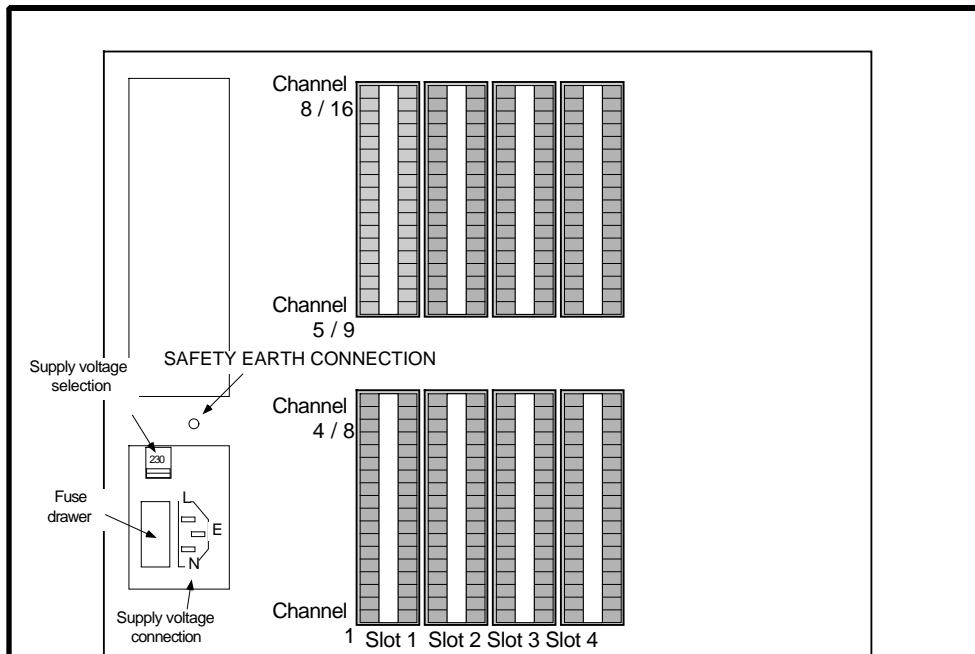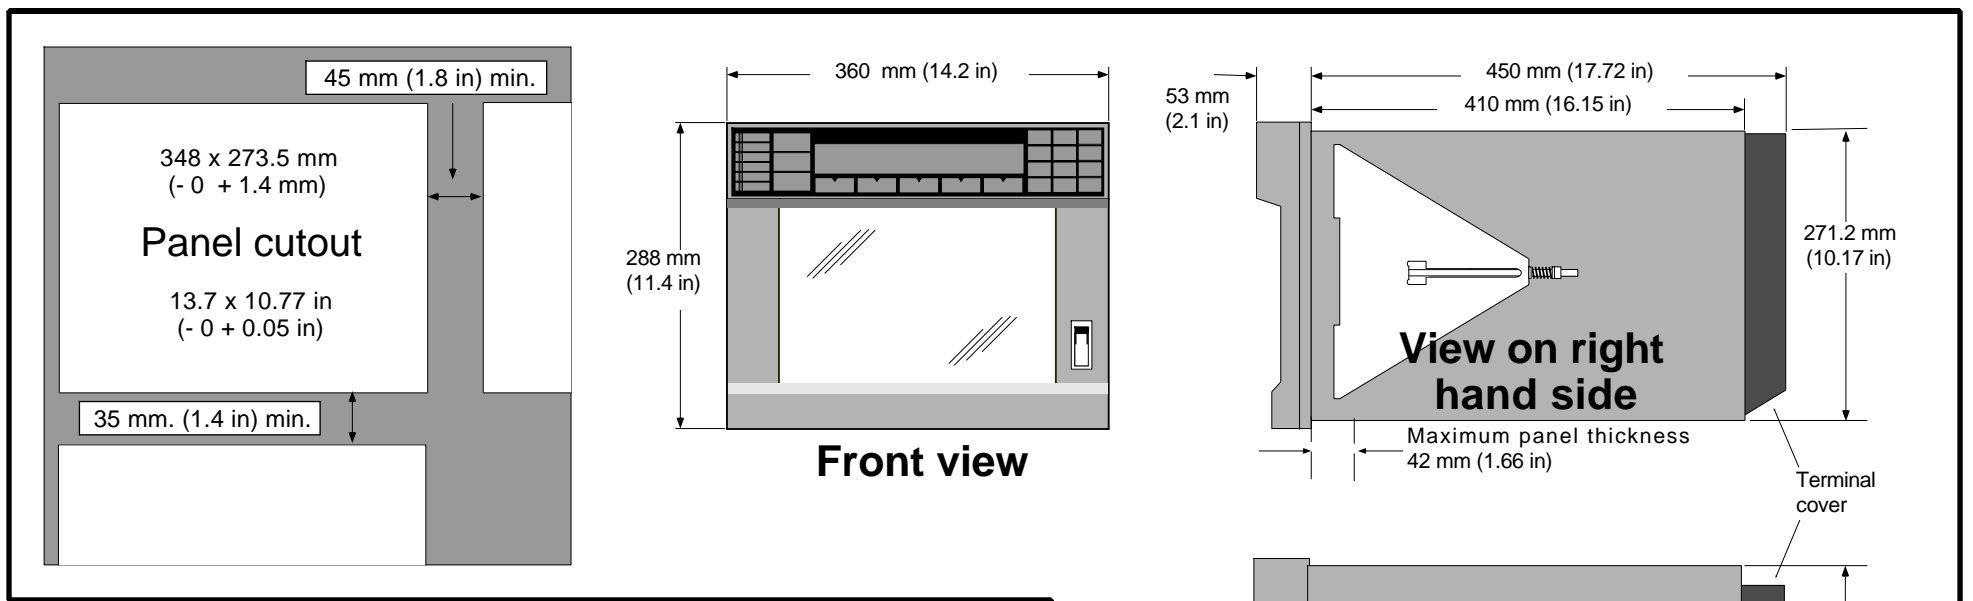

Electrical installation

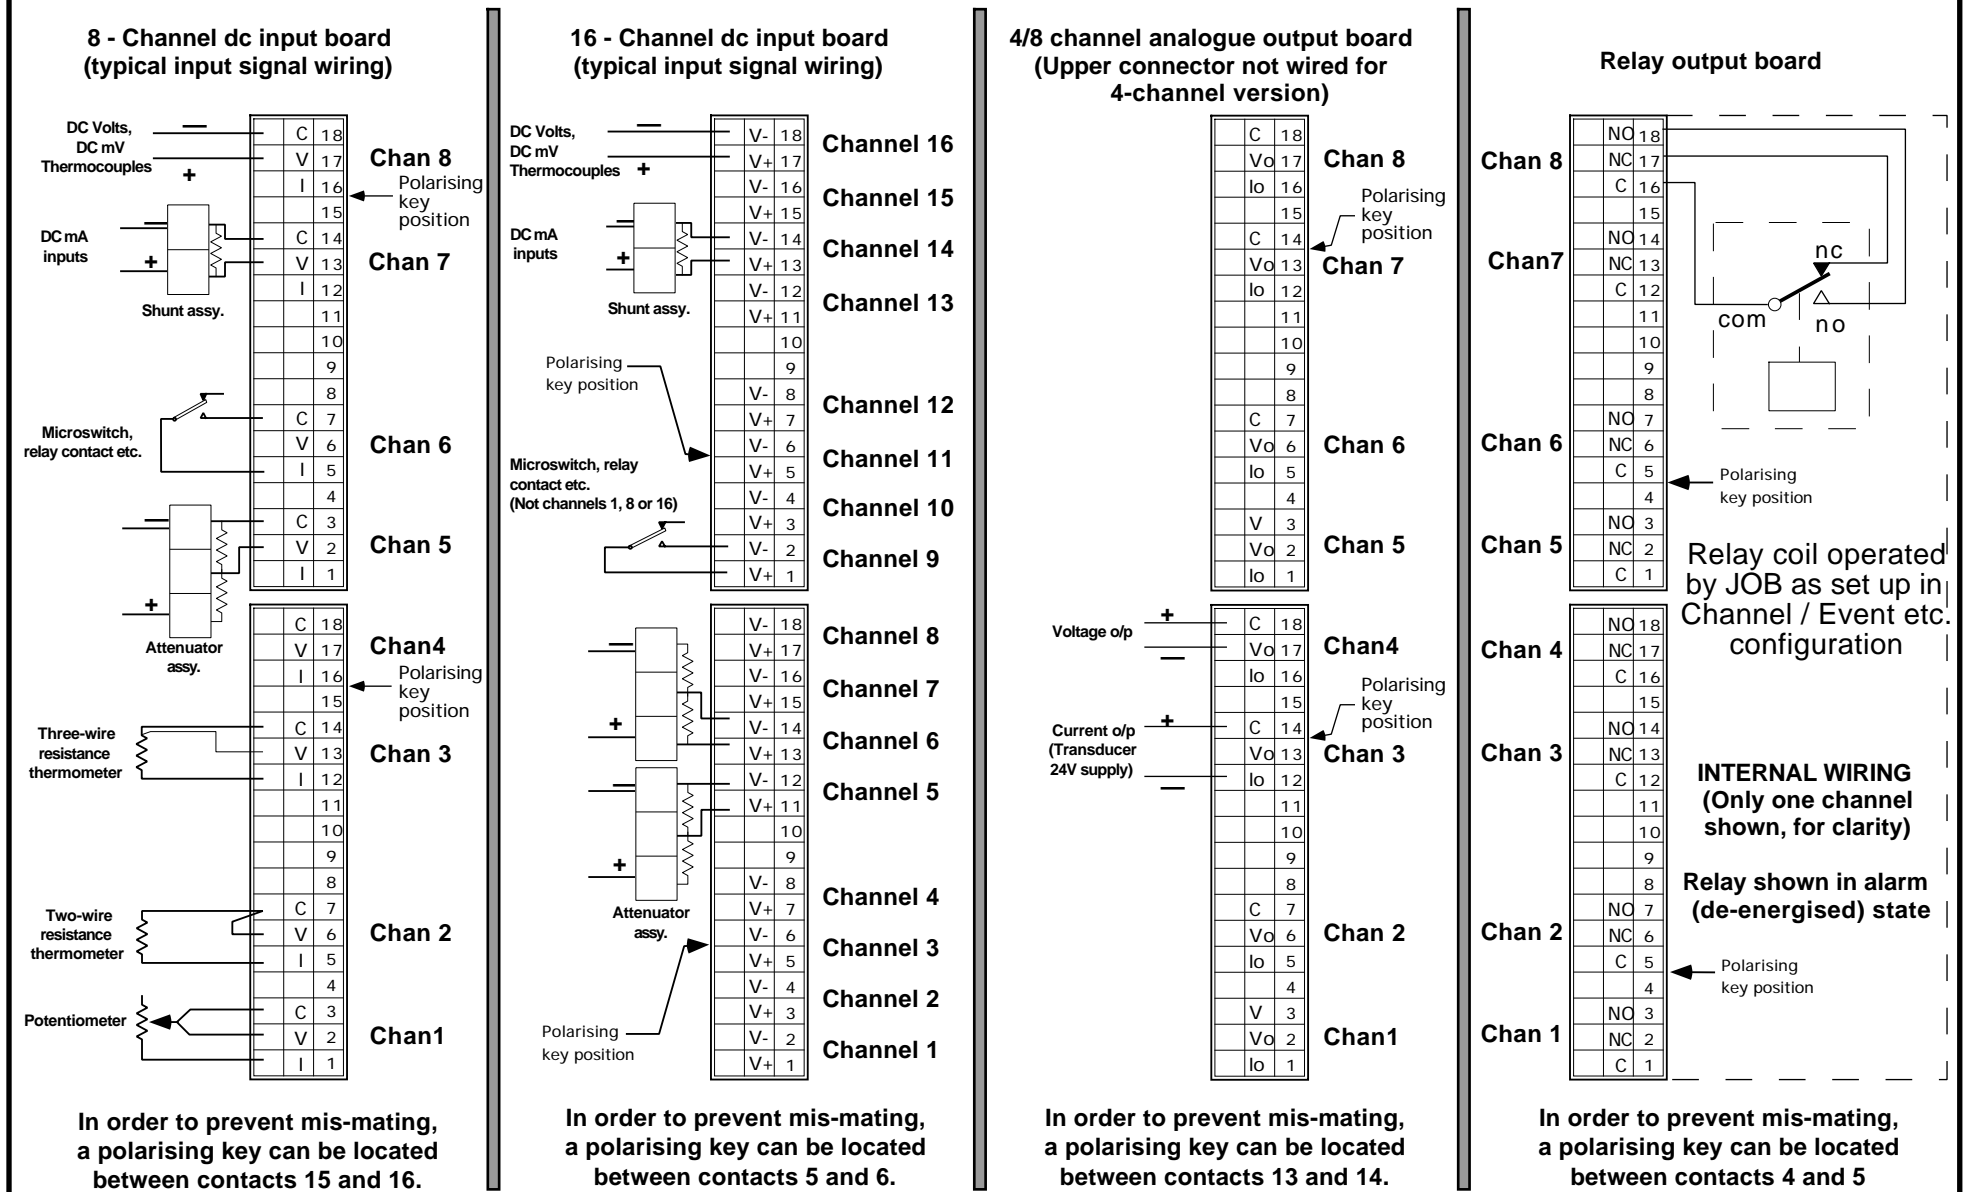

Accessory part numbers : 100 shunt = LA246779UK10; 250 shunt = LA246779UK25; Attenuator = LA244180

Slot 1 is the left-most slot when viewed from the back of the recorder.